



Creating healthy spaces



Topfix[®] Max F

Horizontal sunprotection for large surfaces,
can be mounted in existing open constructions

Topfix® Max F

Through our patented solution, this horizontal sunscreen can be integrated in open structures. This offers a wide range of new mounting possibilities that contribute to the RENSON® Healthy Outdoor Concept. This concept aims to take the outdoor living space to a higher level taking three levels of comfort into account: Physical comfort, Thermal comfort and Visual comfort. The Topfix® Max F can cover extremely large surfaces, up to 30 m²! Its combination with the integrated tension system results in an exceptional fabric tension. As of now, flapping and ruptured screens belong to the past.

Product

- Horizontal sun protection for inside or outside use with revolutionary fabric tension
- Thanks to the patented Smooth Technology the Topfix® Max results in a smooth and quiet operation due to the patented co-extruded wear-resistant top coating:
 - Guarantees a fixed fabric without wrinkles
 - Fabric in every position wind tight: up to 120 km/h
- **Integrated water drainage**
- Surfaces up to 30 m²
- Motor control with **electrical and mechanical safety for the bottom rail**
- Profiles available anodised or powdercoated in any RAL colour
- Soltis® polyester fabric available in a very wide range of colours
- Rensonscreen® Waterproof: innovative screen, translucent and waterproof!
- Fabrics:
 - Soltis® 86: no minimum angle of inclination
 - Soltis® 92, 93 & Rensonscreen® Waterproof: minimum angle of inclination 6° ⁽¹⁾

Applications

- Can be integrated as a terrace covering into existing open wooden, Aluminium or steel structures with or without assembly feet
- For residential construction, catering industry and projects: hospitals, rest homes, offices, schools, etc.

Technical features

- Maximum dimensions:
 - Single: maximal width (W): 5000 mm
 - maximal prolongation (P): 6000 mm
 - maximal surface: 30 m²
- Aluminium casing: H202 mm x D260 mm
- Top-bottom or bottom-top mounting

Guarantee

- 5 year product warranty
- 10 year color coating warranty
- In accordance with EN 13561, wind class 3
- Declaration of performance (DOP) 201409-F006


⁽¹⁾ In function of the dimensions: width (W) x prolongation (P)



Topfix® Max



Topfix® Max F

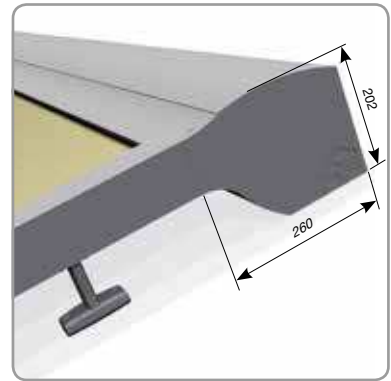

Box



Side channel: Fixscreen® technology



Mechanical safety for the bottom rail



RENSON® reserves the right to make technical changes to the products shown. The latest brochures may be downloaded from www.renson.eu

RENSON® Export Department • Tel. +32 (0)56 62 71 11 • export@renson.net

RENSON® Sunprotection-Screens NV
IZ 1 Flanders Field • Kalkhoevestraat 45 • B-8790 Waregem
Tel. +32 (0)56 62 65 00 • Fax +32 (0)56 62 65 09
export@renson.net • www.renson.eu

RENSON® Fabrications LTD
Fairfax Units 1-5 • Birchholt Road • Parkwood Industrial Estate • Maidstone • Kent ME15 9SF
Tel. 01622/754123 • Fax 01622/689478
info@rensonuk.net • www.renson.eu



Creating healthy spaces