

# AERO® SKYE

## PRODUCT INFORMATION



# TABLE OF CONTENTS

|   |           |
|---|-----------|
| <b>Description</b> .....                        | <b>3</b>  |
| <b>Benefits</b> .....                           | <b>4</b>  |
| Design .....                                    | 4         |
| Quality .....                                   | 4         |
| Customization .....                             | 6         |
| Comfort .....                                   | 6         |
| <b>Technical details</b> .....                  | <b>7</b>  |
| Overview stacked package and opening roof ..... | 8         |
| Standard configuration .....                    | 9         |
| Aero Skye weight .....                          | 10        |
| Aero Skye snow load .....                       | 11        |
| <b>Accessories</b> .....                        | <b>12</b> |
| <b>Certificates &amp; testing</b> .....         | <b>14</b> |
| <b>Configuration</b> .....                      | <b>15</b> |
| Construction method .....                       | 16        |
| Profiles .....                                  | 17        |
| Blade orientation .....                         | 19        |
| Installation .....                              | 20        |
| Water drainage .....                            | 21        |
| Surface-mounted installation .....              | 25        |
| Finishing .....                                 | 26        |
| <b>Other tools</b> .....                        | <b>27</b> |






## DESCRIPTION

**Aluminium patio cover with a rotating and retractable bladed roof that perfectly blends in with the architecture of the existing support structure via integration or surface mounting.**

- Fully retractable roof
- Durable rotation and sliding technology thanks to patented S-drive technology
- Fits perfectly with any existing or new architecture
- Can be joined in multiple parts on the span or pivot side
- Protection from the sun, rain and wind
- Controls via Renson® Connect app\*



One roof  
section



blades closed



blades retracted

SUN  
PROTECTION

VENTILATION

WATERPROOF


RETRACTABLE

\* Full operation via the Renson Connect app is only possible in countries where Somfy io is legally allowed. In countries where only Somfy RTS is allowed, operation of Fixscreen, Led-lighting and heating is done via separate hand transmitter.



# BENEFITS

## Design

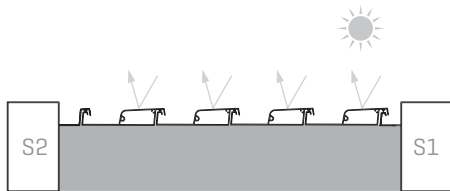

**1 THE ROOF IS COMPLETELY FLAT WHEN CLOSED**


**2 MINIMAL GAPS BETWEEN THE BLADES**

**3 MINIMALIST DESIGN**

**4 INVISIBLE SCREWS**

create an elegant and sleek structure

## Quality

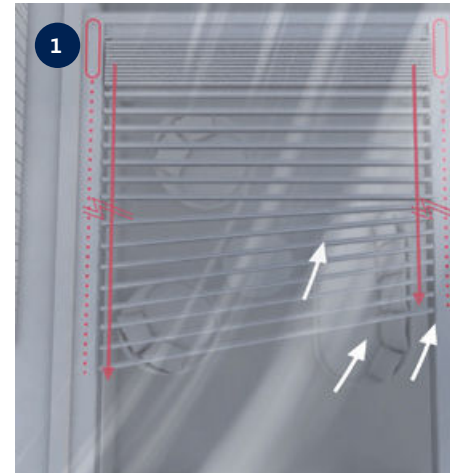

**1 'TRAIN' SYSTEM (OTHER BRANDS ON THE MARKET)**

Only the first blade [the locomotive] is driven, and all other blades [the carriages] are passively pulled along.



**2 SYNCHRONISED DRIVE ON BOTH SIDES OF THE BLADES**

Even with an asymmetric load, the roof will open and close in one smooth movement

**3 RENSON® S-DRIVE**

### INNOVATION

Driven by a spindle that evenly distributes traction across all blades.

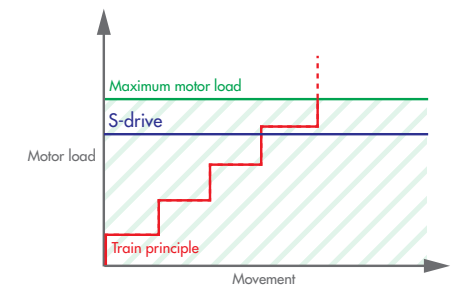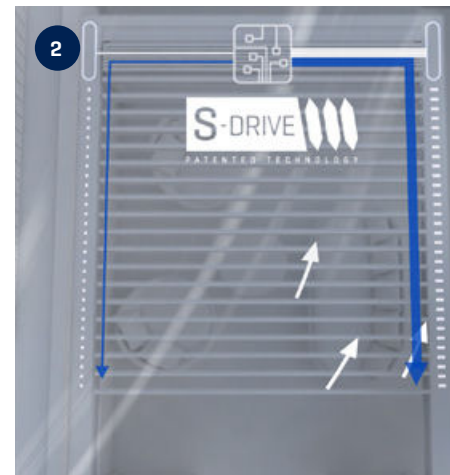



#### **4 SPINDLE FOR SLIDING BLADES**

INNOVATION

#### **5 TROLLEYS ON RAILS ENSURE SMOOTH AND STABLE MOVEMENT**

Each blade is driven individually


#### **6 HEXAGONAL AXLE FOR ROTATING BLADES**

#### **7 STRONG, DOUBLE-WALLED BLADES CAN HANDLE HEAVY SNOW LOADS**

#### **8 UNIQUE END CAPS**

provide a solid corner connection and perfect water drainage

#### **9 WELDED ALUMINIUM DRIPS, POWDER COATED TO MATCH THE COLOUR OF THE ROOF BLADES**

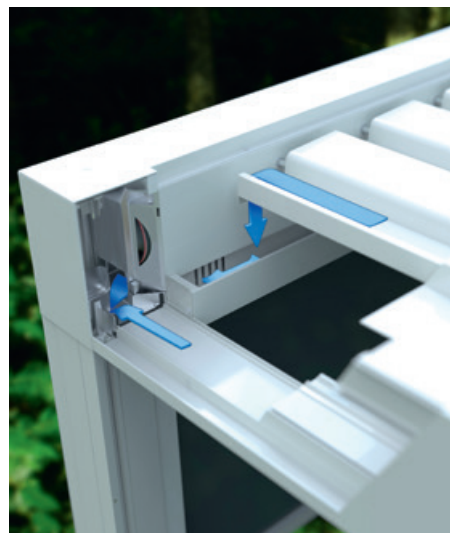

#### **10 SPLASH PREVENTION**


Via integrated water channels with diffusers

#### **11 HIGH WATER DRAINAGE FLOW**

Through the wide blade gutters

## Customisation

For more information about the possible accessories, see the 'Accessories' section and/or the product information for the various accessories.

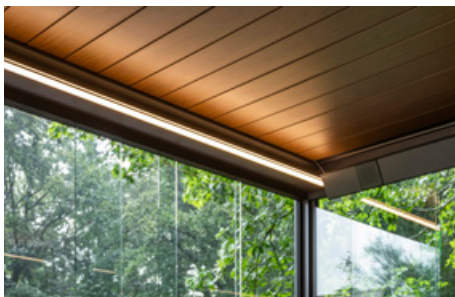

## Comfort

### 1 MAXIMUM NATURAL LIGHT

The blades not only rotate through 135°, they can also be fully retracted.

### 2 SPECIALLY DEVELOPED GUTTER BORDER

#### INNOVATION

Prevents your patio and furniture from getting wet when the blades are opened following a rain shower

### 3 SILENT AND SOFT CLOSING MECHANISM BY ADDING A BRUSH TO THE BLADES

### 4 QUICK INSTALLATION

Thanks to maximum pre-assembly and the modular structure of the various junctions.



# TECHNICAL DETAILS



| Dimensions                                      |                                     |
|---|-------------------------------------|
| Span  | Min. 1800* – max. 4500 mm           |
| Pivot   | Min. 3250 – max. 6200 mm            |
| Passage height                                  | N/A                                 |
| Total height with blades closed                 | 260 mm [= frame height]             |
| Total height with blades 90° open               | 355 mm [= frame height 260 + 95 mm] |
| Blade rotation                                  | Max. 135°                           |
| Minimum number of water drainage points < 16 m² | 1                                   |
| Minimum number of water drainage points > 16 m² | 2                                   |
| Operating methods                               |                                     |
| Renson Connect app **                           | ✓                                   |
| Renson Connect + remote control ***             | ✓                                   |
| Home automation ready                           | ✓                                   |

\* Smaller dimensions [span min. 1800 mm] possible by special request to presales – drawing office.

\*\* Full operation via Renson Connect app, for countries where Somfy io is legally allowed.


\*\*\* For countries where only Somfy RTS is allowed, operation of the roof is via Renson Connect app and operation of LED and/or heating is via hand transmitter.

## Electrical bladed roof drive


| Parameters                               | Value              |
|--|--------------------|
| Supply voltage                           | 230 Volt AC, 50 Hz |
| Transformer current range                | 0 – 3.5 Ampère     |
| Transformer power                        | 2 x 150 W          |
| Motor voltage                            | 24 Volt DC         |
| Motor nominal current                    | 6 Ampère           |
| Protection rating                        | IP 65              |
| Maximum running time with continuous use | Approx. 10 minutes |
| Automatic                                | 16 A Curve C       |

## Overview stacked package and opening roof

| Pivot in mm | Number of blades | Thickness package in mm | Opening roof in mm |
|-------------|------------------|-------------------------|--------------------|
| 3250        | 13               | 768                     | 2125               |
| 3410        | 14               | 818                     | 2260               |
| 3625        | 15               | 868                     | 2425               |
| 3840        | 16               | 918                     | 2590               |
| 4055        | 17               | 968                     | 2755               |
| 4270        | 18               | 1018                    | 2920               |
| 4485        | 19               | 1068                    | 3085               |
| 4700        | 20               | 1118                    | 3250               |
| 4915        | 21               | 1168                    | 3415               |
| 5130        | 22               | 1218                    | 3580               |
| 5345        | 23               | 1268                    | 3745               |
| 5560        | 24               | 1318                    | 3910               |
| 5775        | 25               | 1368                    | 4075               |
| 5990        | 26               | 1418                    | 4240               |
| 6200        | 26               | 1463                    | 4270               |

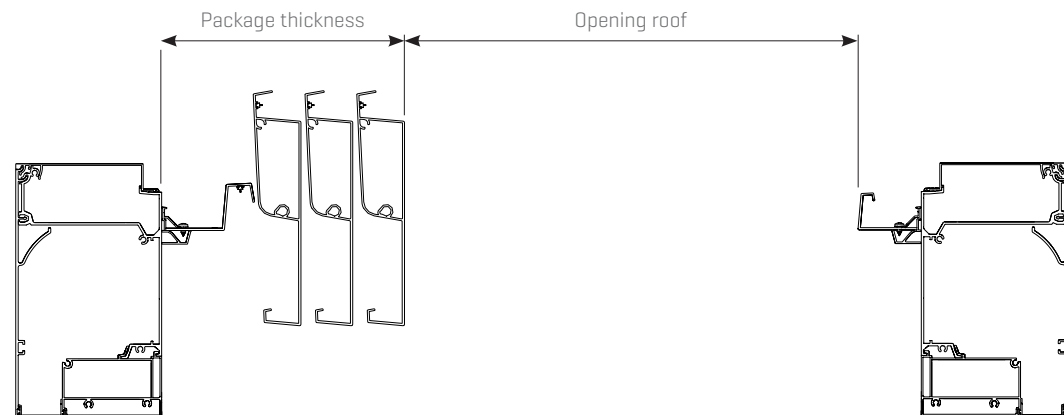



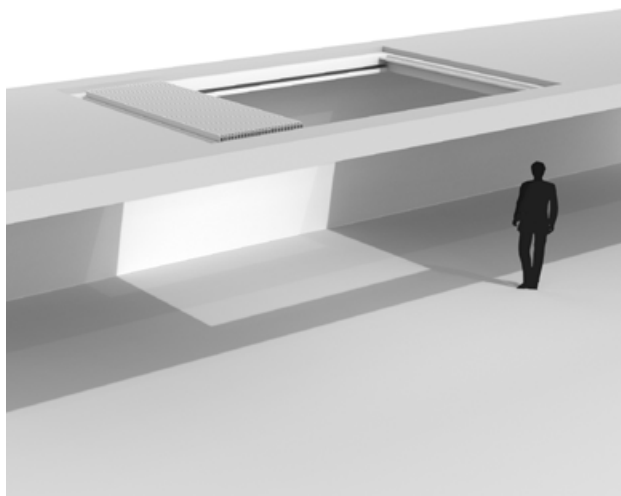


## Standard configuration

### Construction:

- Roof structure to be placed on the top of or to be integrated in an existing support structure.
- Customisation of the span and pivot with mm precision.
- Patented S-drive motor

### Finishing:

- Seaside Quality A
- Monocolour or dual colour according to Renson standard colours
- Integrated water drainage [incl. anti-splash diffusers in the gutter]

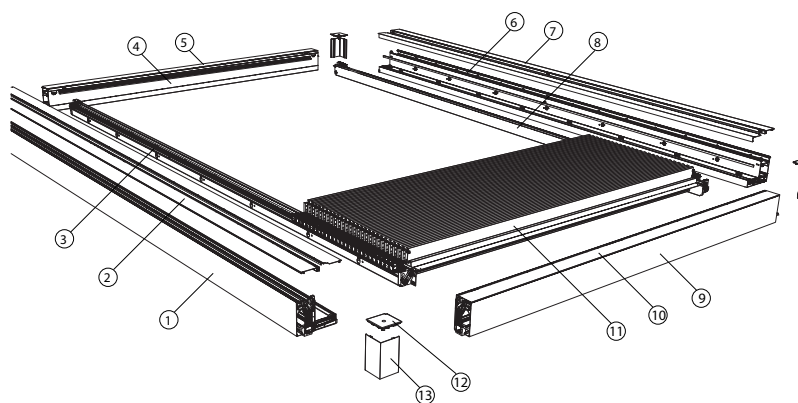

|    |                            |
|----|----------------------------|
| 1  | Pivot beam 2 + front cover |
| 2  | Top cover [2 parts]        |
| 3  | Skye mechanism P2          |
| 4  | Span beam 1                |
| 5  | Top cover [1 part]         |
| 6  | Pivot beam 1 + front cover |
| 7  | Top cover [2 parts]        |
| 8  | Skye mechanism P1          |
| 9  | Span beam 1 + front cover  |
| 10 | Top cover [1 part]         |
| 11 | Blades                     |
| 12 | Top cover                  |
| 13 | Corner cover               |

## Aero Skye weight

| Total weight [kg] of entire Aero Skye |          |          |      |      |      |      |      |      |      |
|---------------------------------------|----------|----------|------|------|------|------|------|------|------|
| Span                                  |          |          |      |      |      |      |      |      |      |
|                                       | # blades | # blades | 1500 | 2000 | 2500 | 3000 | 3500 | 4000 | 4500 |
| Pivot                                 | 3250     | 13       | 235  | 268  | 300  | 333  | 366  | 398  | 431  |
|                                       | 3410     | 14       | 245  | 279  | 313  | 347  | 382  | 416  | 450  |
|                                       | 3625     | 15       | 257  | 292  | 328  | 364  | 400  | 435  | 471  |
|                                       | 3840     | 16       | 268  | 306  | 343  | 380  | 418  | 455  | 492  |
|                                       | 4055     | 17       | 280  | 319  | 358  | 397  | 436  | 475  | 514  |
|                                       | 4270     | 18       | 292  | 333  | 373  | 414  | 454  | 494  | 535  |
|                                       | 4485     | 19       | 304  | 346  | 388  | 430  | 472  | 514  | 556  |
|                                       | 4700     | 20       | 316  | 360  | 403  | 447  | 490  | 534  | 577  |
|                                       | 4915     | 21       | 328  | 373  | 418  | 463  | 508  | 553  | 598  |
|                                       | 5130     | 22       | 340  | 386  | 433  | 480  | 526  | 573  | 620  |
|                                       | 5345     | 23       | 352  | 400  | 448  | 496  | 544  | 593  | 641  |
|                                       | 5560     | 24       | 364  | 413  | 463  | 513  | 563  | 612  | 662  |
|                                       | 5775     | 25       | 375  | 427  | 478  | 529  | 581  | 632  | 683  |
|                                       | 5990     | 26       | 387  | 440  | 493  | 546  | 599  | 652  | 704  |
|                                       | 6200     | 26       | 396  | 449  | 502  | 555  | 607  | 660  | 713  |

The table above shows the weight of the Skye structure.

|                    |          |      |
|--------------------|----------|------|
| Pivot beam weight  | 16.82844 | kg/m |
| Span beam weight   | 12.54315 | kg/m |
| Skye beam weight   | 3.7      | kg/m |
| Blade weight       | 3.1      | kg/m |
| Fixed blade weight | 0.59     | kg   |

## Aero Skye snow load

### Single Aero Skye

For span lengths < 3625 mm, the load-bearing capacity is determined by the pivot length.  
For span lengths > 3625 mm, the load-bearing capacity is no longer determined by the pivot dimensions, but exclusively by the span length [blade length] instead.

| Aero Skye maximum snow load (kg/m²) |                  |      |      |      |      |      |      |      |      |      |      |      |
|-------------------------------------|------------------|------|------|------|------|------|------|------|------|------|------|------|
|                                     |                  | Span |      |      |      |      |      |      |      |      |      |      |
| Pivot                               | Dimensions in mm | 2000 | 2250 | 2500 | 2750 | 3000 | 3250 | 3500 | 3750 | 4000 | 4250 | 4500 |
|                                     | 4000             | 866  | 563  | 385  | 273  | 199  | 149  | 113  | 87   | 68   | 53   | 41   |
|                                     | 4250             | 866  | 563  | 385  | 273  | 199  | 149  | 113  | 87   | 68   | 53   | 41   |
|                                     | 4500             | 866  | 563  | 385  | 273  | 199  | 149  | 113  | 87   | 68   | 53   | 41   |
|                                     | 4750             | 862  | 563  | 385  | 273  | 199  | 149  | 113  | 87   | 68   | 53   | 41   |
|                                     | 5000             | 727  | 563  | 385  | 273  | 199  | 149  | 113  | 87   | 68   | 53   | 41   |
|                                     | 5250             | 619  | 536  | 385  | 273  | 199  | 149  | 113  | 87   | 68   | 53   | 41   |
|                                     | 5500             | 530  | 459  | 385  | 273  | 199  | 149  | 113  | 87   | 68   | 53   | 41   |
|                                     | 5750             | 457  | 395  | 348  | 273  | 199  | 149  | 113  | 87   | 68   | 53   | 41   |
|                                     | 6000             | 396  | 342  | 301  | 268  | 199  | 149  | 113  | 87   | 68   | 53   | 41   |
|                                     | 6200             | 354  | 306  | 269  | 240  | 199  | 149  | 113  | 87   | 68   | 53   | 41   |



# ACCESSORIES



| Comfort pack                     |   | Reorder |
|----------------------------------|---|---------|
| Fixscreen + Lineo LED            | - | -       |
| Sideways inserts                 |   |         |
| Integrated Fixscreen             | - | -       |
| Algarve Fixscreen                | - | -       |
| Lapure Fixscreen                 | - | -       |
| Triangle                         | - | -       |
| Loggia® sliding panels           | - | -       |
| Loggiascreen Canvas sliding door | - | -       |
| Glass sliding panels             | - | -       |
| Linus wall                       | - | -       |
| Linarte wall                     | - | -       |
| Outdoor curtains                 | - | -       |
| Comfort Lighting                 |   |         |
| Lineo LED                        | - | -       |
| UpDown LED                       | ✓ | ✓       |
| Colomno LED                      | - | -       |
| Lapure LED                       | - | -       |
| Comfort and design               |   |         |
| Beam Heat & Sound*               | ✓ | ✓       |
| Lineo Luce                       | - | -       |
| Lineo Fix                        | - | -       |
| Lineo Heat                       | - | -       |
| Waterproof wall mounting         | - | -       |
| Protecto protective profile      | - | -       |
| Automation                       |   |         |
| Wind sensor **                   | - | -       |
| Rain sensor                      | ✓ | ✓       |
| Sun sensor                       | - | -       |

\* Beam only possible on span side, not on pivot side

\*\* No physical wind sensor needed as can be set as for frost and snow during installation. Works based on the set country and zip code through an online weather server.



| Styling                |   | Reorder |
|------------------------|---|---------|
| Classic Line           | - | -       |
| Wooddesign roof blades | ✓ | ✓       |
| Columns                |   |         |
| Extra column           | - | -       |
| Shifted column         | - | -       |
| Adjustable wall column | - | -       |



# CERTIFICATES & TESTING

## CE – DoP documents

- CE / UKCA / DoC / DoP / ETA

## Certificates

- REACH / seaside/coastal powder coating guarantee
- RoHS / AluEco
- VMRG sun protection

## Declarations

- Declaration of material codes
- Declaration of powder coating
- Declaration of anodisation layer thickness
- Declaration of glass properties
- Declaration of fire resistance / reaction
- Declaration of endurance cycles
- Declaration of asbestos
- Declaration of UV resistance / gtot + others

## Test reports – calculations

- Environmental statement (recycled aluminium)
- Anchoring requirements
- Wind (load) testing / verification certificate

|  |                    |
|--|--------------------|
| Wind guarantee of roof with blades closed                                    | up to 120 km/h     |
| Wind guarantee of roof with blades retracted                                 | up to 160 km/h     |
| Wind guarantee with blades extended and rotated to a vertical position (90°) | up to 120 km/h     |
| Fixscreen wind guarantee when closed   | N/A                |
| Roof operation   | up to max. 50 km/h |
| Water drainage flow  | 150 l/m².h         |
| Load-bearing capacity  | 100 kg/m²          |


## Application in sandy environments

The abrasive effect of sand can cause blockages of the Skye mechanism. Therefore the application of Skye systems is not allowed at less than 200 meters from sandy environments such as sandy beaches, dunes, deserts...




# CONFIGURATION




Joined on pivot side

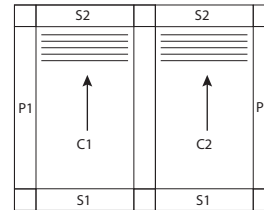

- Two-part or three-part joined
- Blade retraction: same direction for all roof sections
- For surface mounting or integration







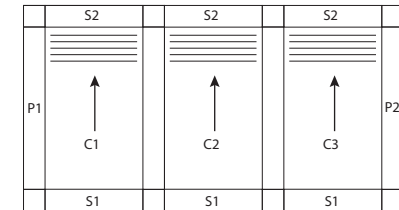


Joined on span side

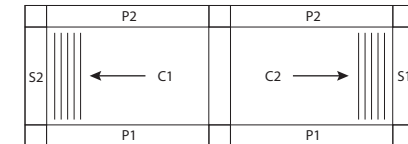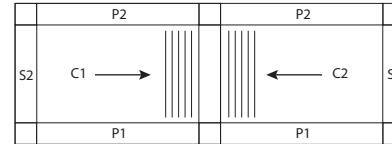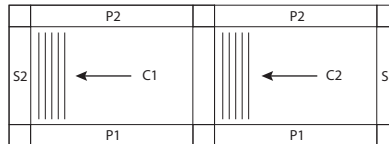


- Two-part or three-part joined
- Blade retraction: same direction, towards one another, away from one another
- For surface mounting or integration


The blades of the two roof sections will rotate differently relative to one another in the two setups below:

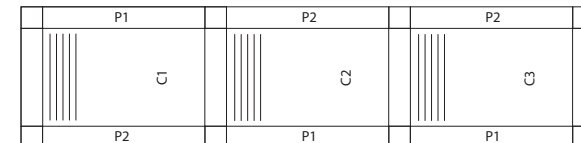

## Construction method

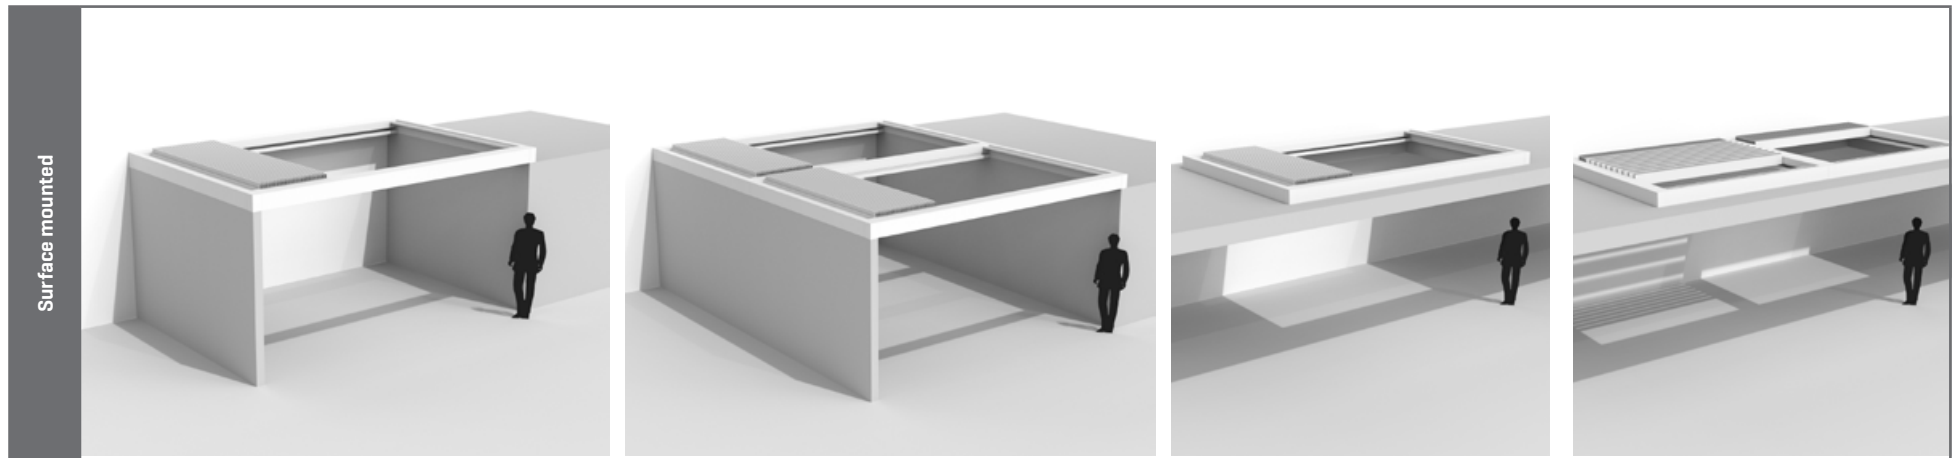




In this construction method, the frame is placed on an existing structure. The installer will need to drill the required installation holes.

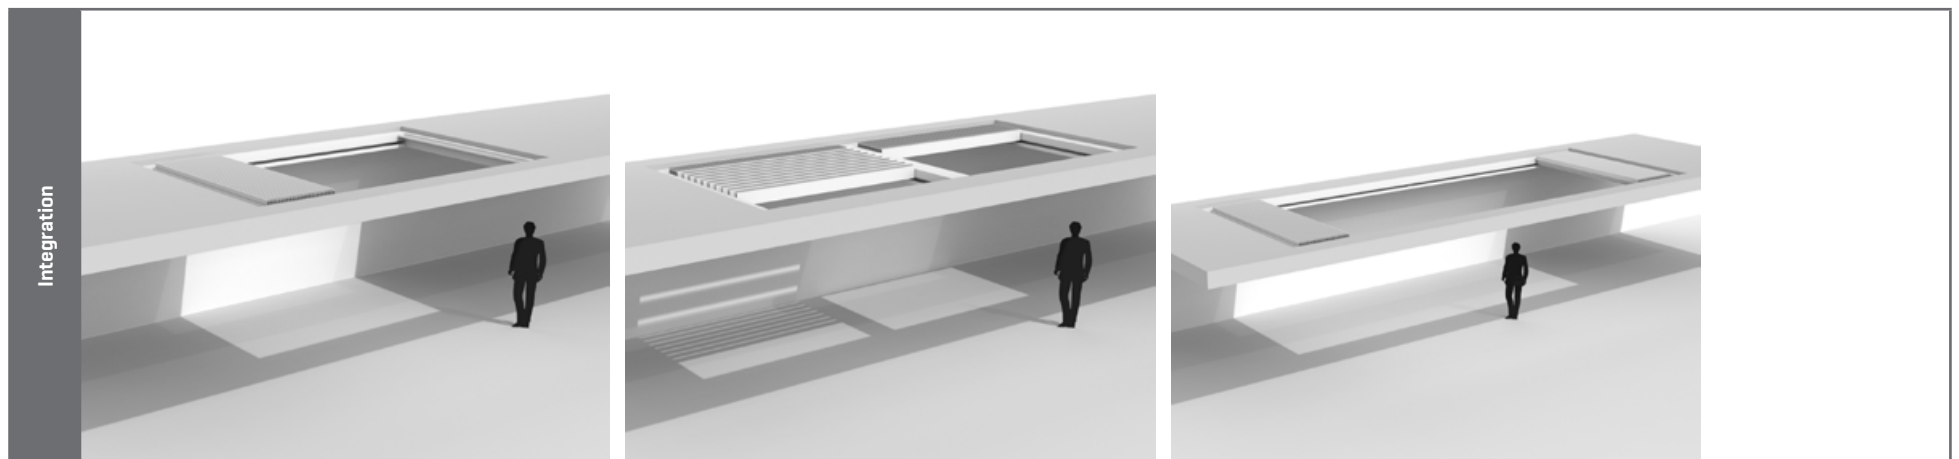

If the frame is to be integrated into an existing opening, it will be affixed sideways in the opening.



Profiles


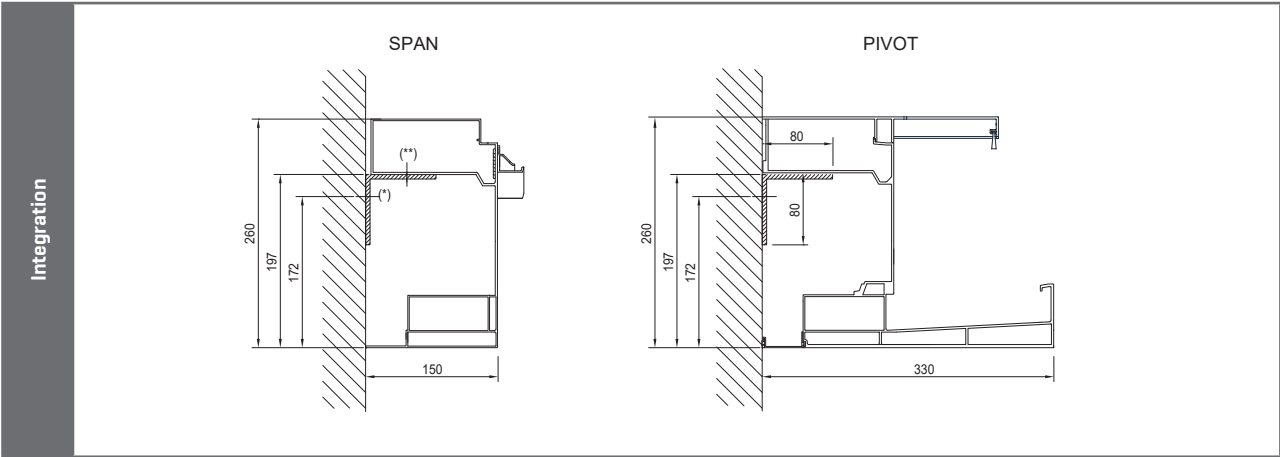
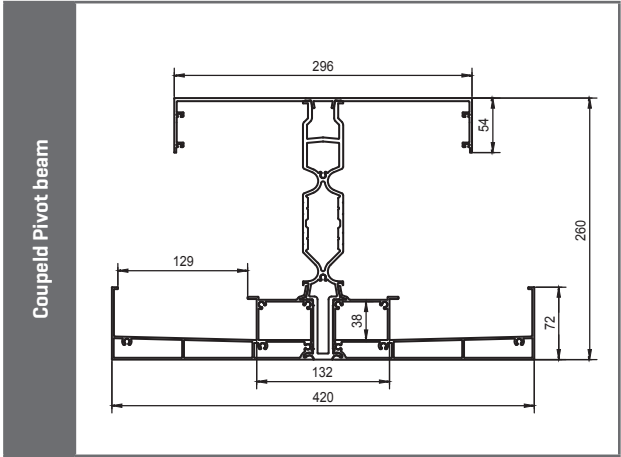
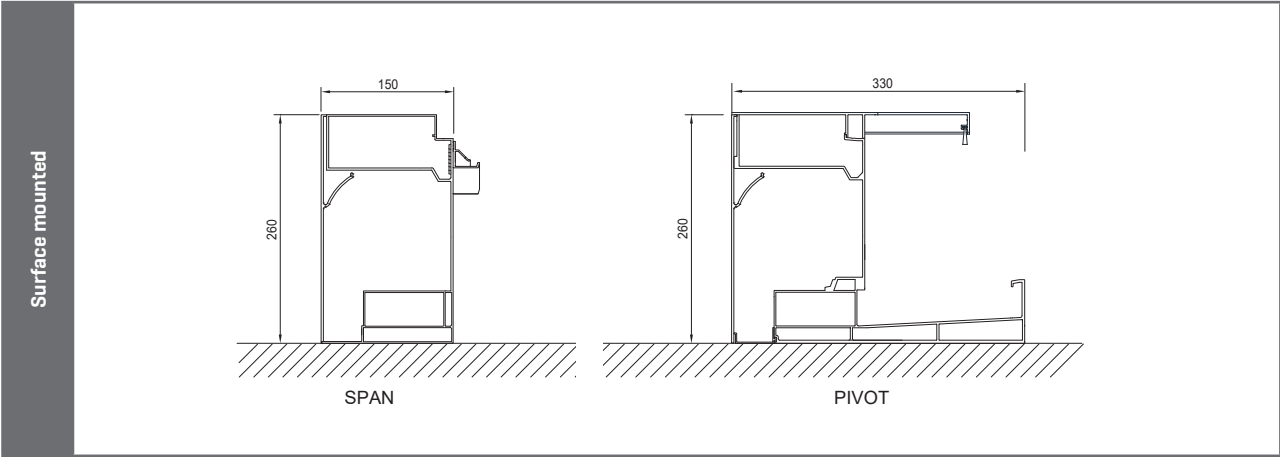


## Outer corner finishing cover

When ordering, please specify the construction method for each span and pivot side.

Depending on which one of the two construction methods you opt for, there is also a significant difference in terms of the finishing cover supplied for the outer corner.

- Surface mounted: includes finishing cover for the side in question
- Integrated: no finishing cover for the side in question and no front cover on the integration side(s), as these are replaced by an L-shaped wall-mounting profile.

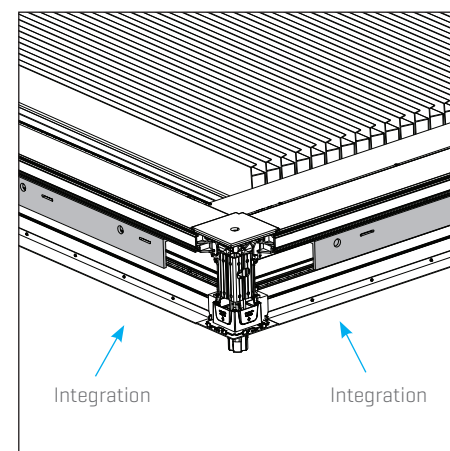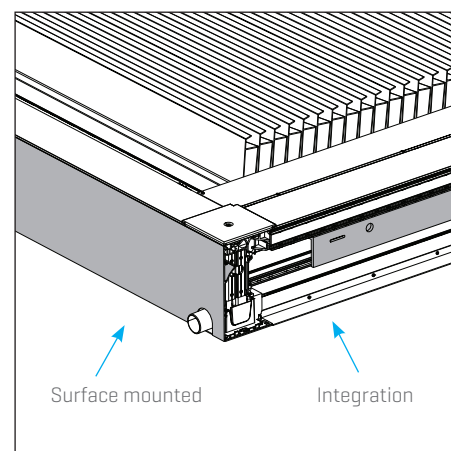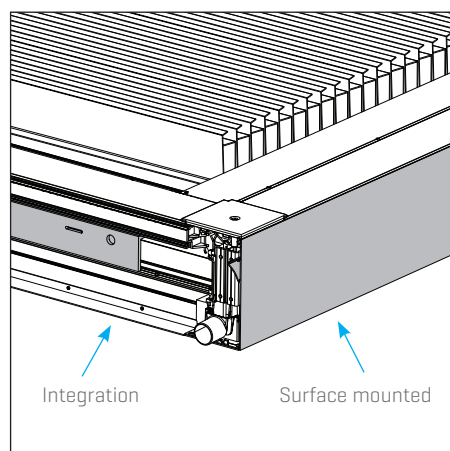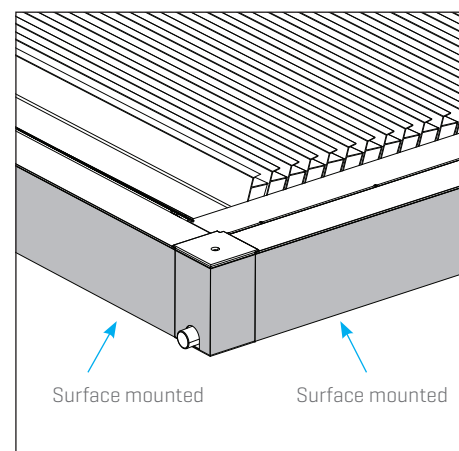


## Bottom finishing cover

The bottom finishing cover protrudes a few mm from the underside of the structure. If you place Aero Skye on top of another structure, you have the possibility to do so without the bottom finishing cover. That way, the bottom of the profiles fit nicely against the support structure.

If the bottom of the frame profiles is to be finished with another material and will ultimately no longer be visible, there is no need to place a finishing cover on the bottom corners.

Blade orientation

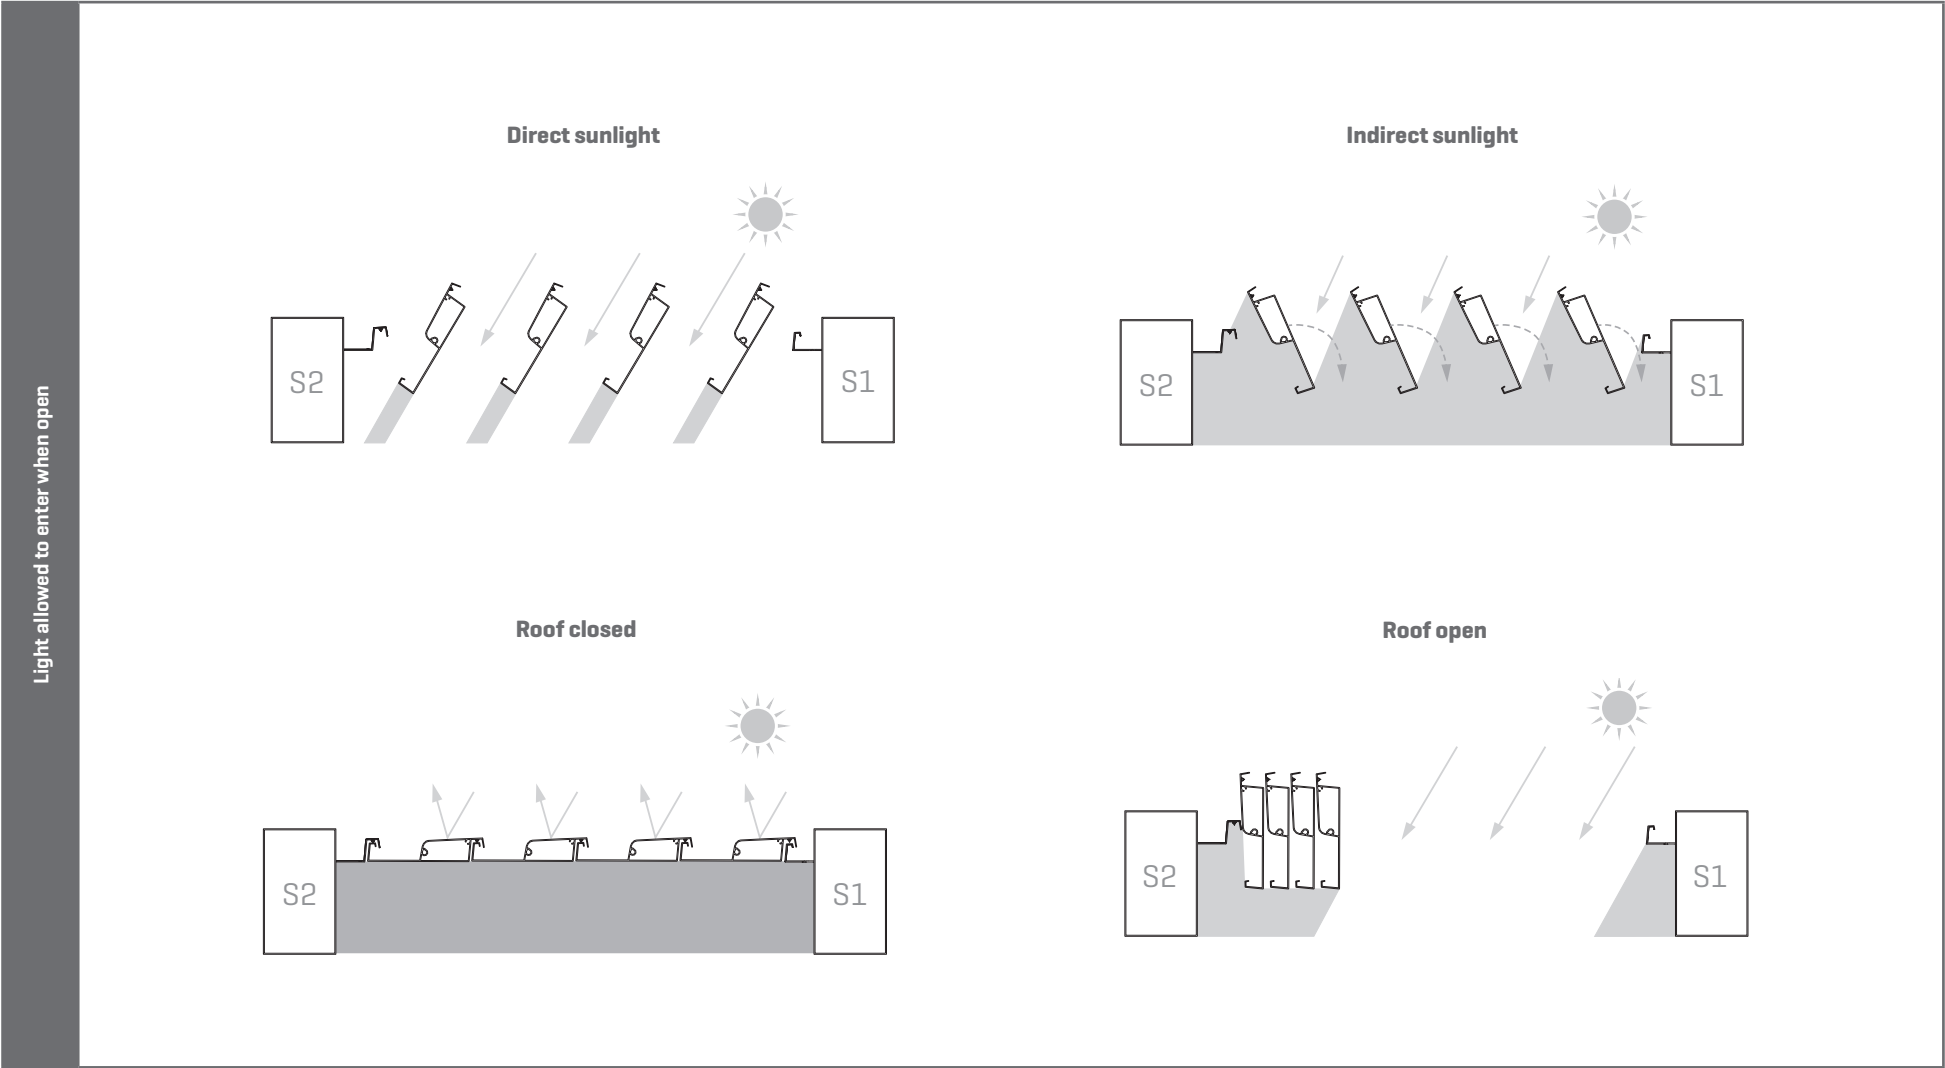

## Installation


For Aero Skye, you must select the construction method for each side [span [S] – pivot [P]] when ordering. You can choose between integration and surface mounted when doing so.

### Surface mounted

No screws are supplied as these need to be suitable for the supporting structure, which differs from situation to situation.

### Integration

A wall-mounting profile is supplied if Aero Skye is to be integrated. Only the screws required to fasten the frame profile to the wall-mounting profile are supplied. No screws are supplied to fasten the frame profiles to the existing structure, as these need to be suitable for the supporting structure, which differs from situation to situation.


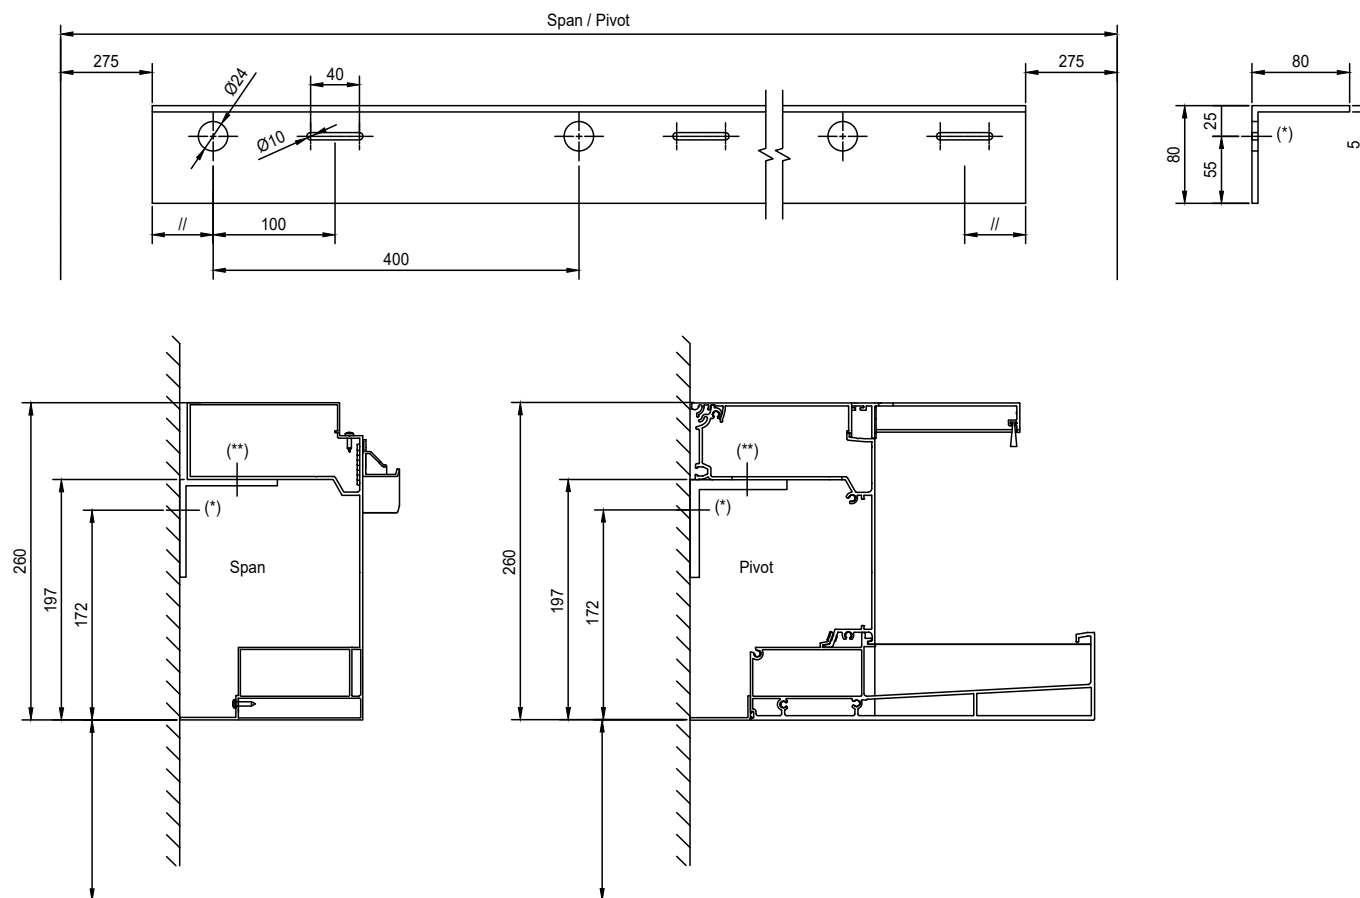




## Water drainage


### Water drainage direction

The blades are double-walled, with part serving as a gutter. The blades sit at an angle of 3 cm. From the wide blade gutter, water will mainly drain to the lowest side and flow into the structure's integrated gutters. The structure is fitted with an integrated gutter all around.

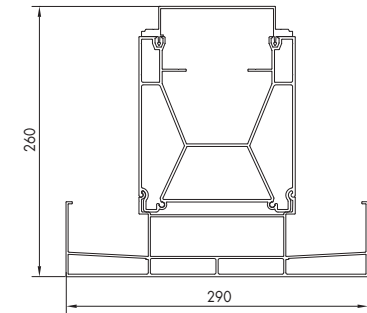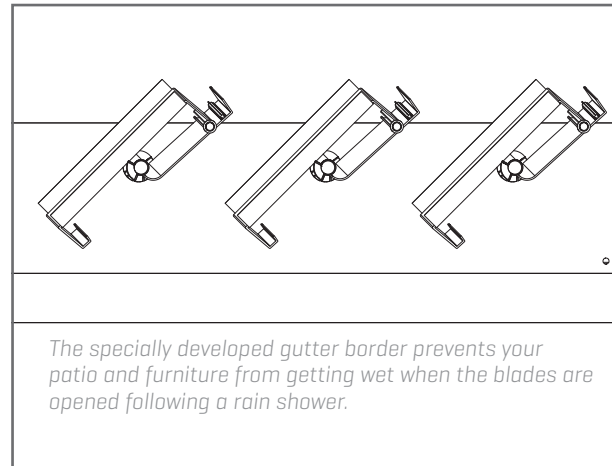


Coupeld Pivot beam

Span beam

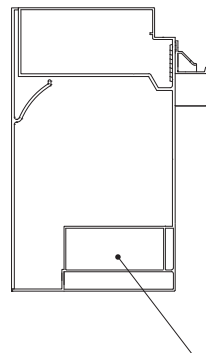


Internal gutter

Pivot beam

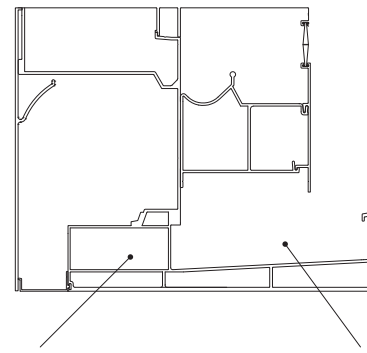

Internal gutter

External gutter

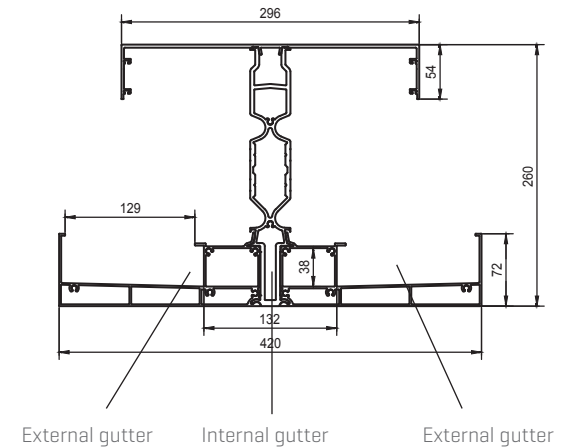

External gutter


Internal gutter


External gutter

## Water drainage types

Water drainage can occur in three ways:

- Downwards through corner
- Sideways through corner
- Downwards through gutter

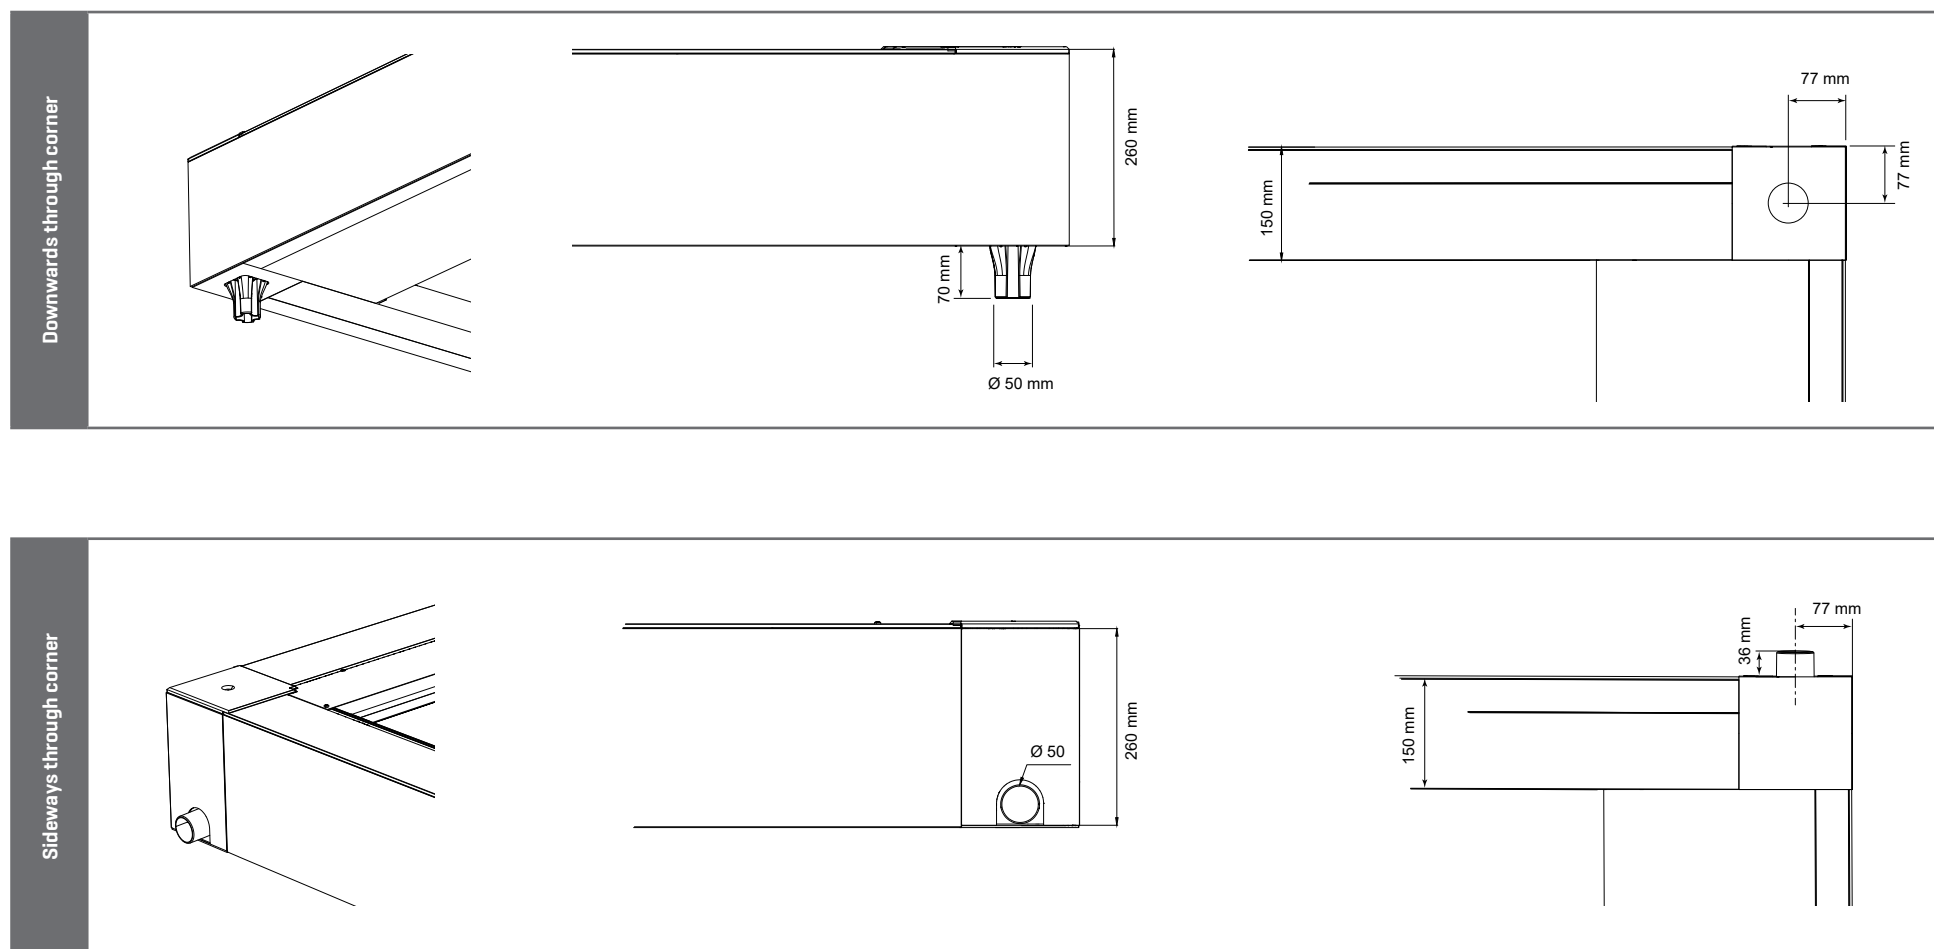

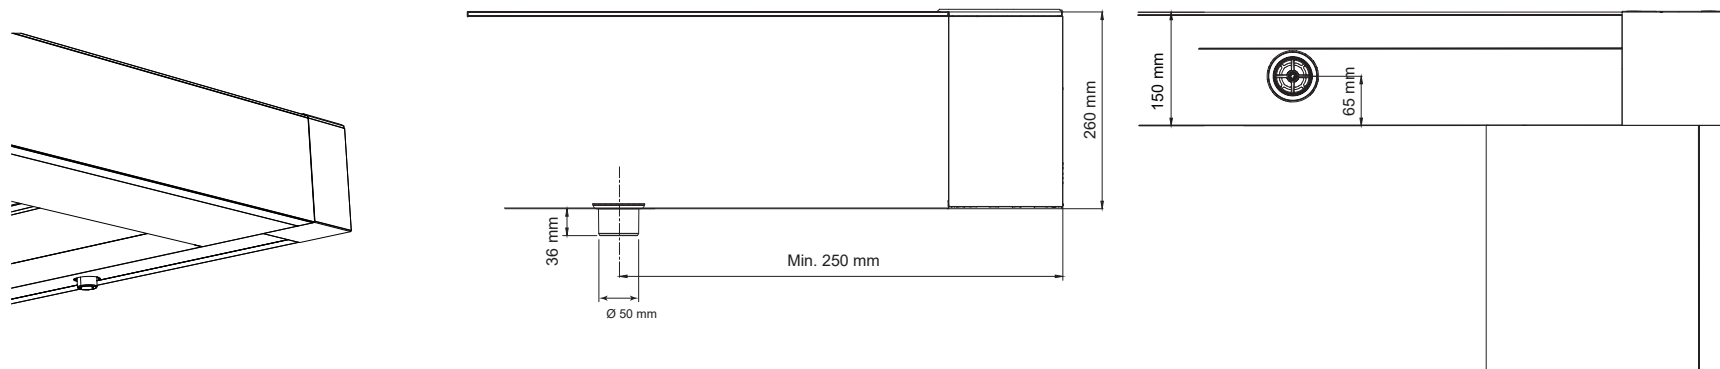

## Number of water drainage points

Water will be drained down an integrated drainpipe in the columns of your choice. Starting at 16 m<sup>2</sup>, a minimum of two water drainage outlets must be provided for each roof section, of which at least one drain must be on the lowest side of the blades (not on the motor side). For all other dimensions, at least one drain must be arranged on the lowest side of the blades (not on the motor side).

### Please note!

If there is only one water drainage column and the surface area is greater than 16 m<sup>2</sup>, the drainage capacity of the roof will only be 90 litres per hour [0.025 L/m<sup>2</sup>.s].




## Surface-mounted installation




## Finishing

Recessed

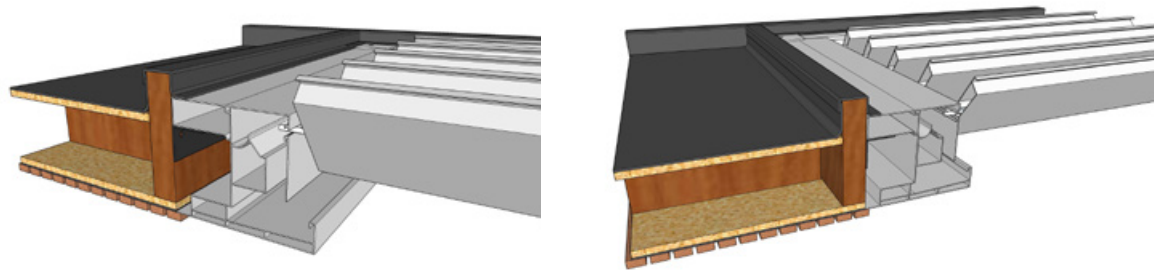

Surface mounted

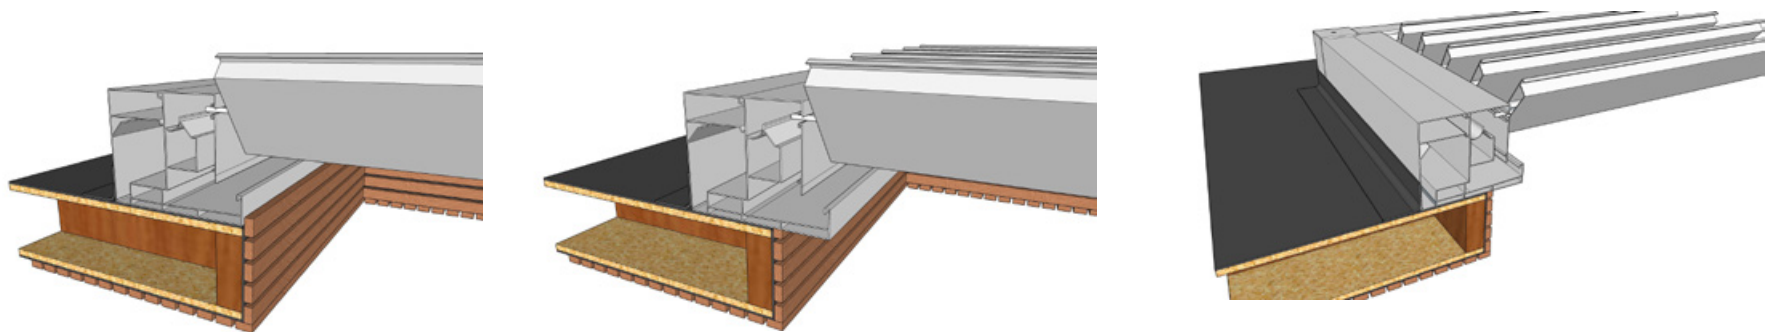

# OTHER TOOLS

Want to find out more? Visit the Professional Portal on our website ([www.renson.eu](http://www.renson.eu)) to access the following tools.

- Technical drawings
- Training documents
- Installation manual
- User manual
- [Digital photo book & social media](#)
- ...

